DAWGS FOUR DEPARTURE (RNAV)

(DAWGS4.DAWGS) 10098

ATLANTA/ HARTSFIELD-JACKSON ATLANTA INTL (ATL)

ATLANTA, GEORGIA

ATIS DEP 125.55
CLNC DEL 118.1
GND CON
121.9 381.6 (Rwys 8L-26R, 8R-26L)
121.75 381.6 (Rwys 9L-27R, 9R-27L)
121.65 381.6 (Rwy 10-28)
ATLANTA TOWER
119.1 381.6 (Rwy 8L-26R)
125.325 381.6 (Rwy 8R-26L)
119.3 381.6 (Rwy 9R-27L)
123.85 381.6 (Rwy 9L-27R)
119.5 381.6 (Rwy 10-28)
ATLANTA DEP CON
125.7 (Rwys 8L-26R, 8R-26L)
125.65 (Rwys 9L-27R, 9R-27L)
135.375 (Rwy 10-28)

NOTE: Accelerate to 250 KIAS, if unable, advise ATC.
NOTE: For Turbojet aircraft only.
NOTE: RADAR Required.
NOTE: Use departure frequency depicted unless otherwise assigned.
NOTE: DME/DME/IRU or GPS Required.
NOTE: RNAV 1.
NOTE: Midfield aircraft at Ramps 1, 2, 3, 4, 5, and 6 will advise Ramp Towers of Departure SID prior to pushback. Upon receipt of ATC clearance (from ATL Clearance Delivery), readback only your call sign and transponder code, unless you have a question.

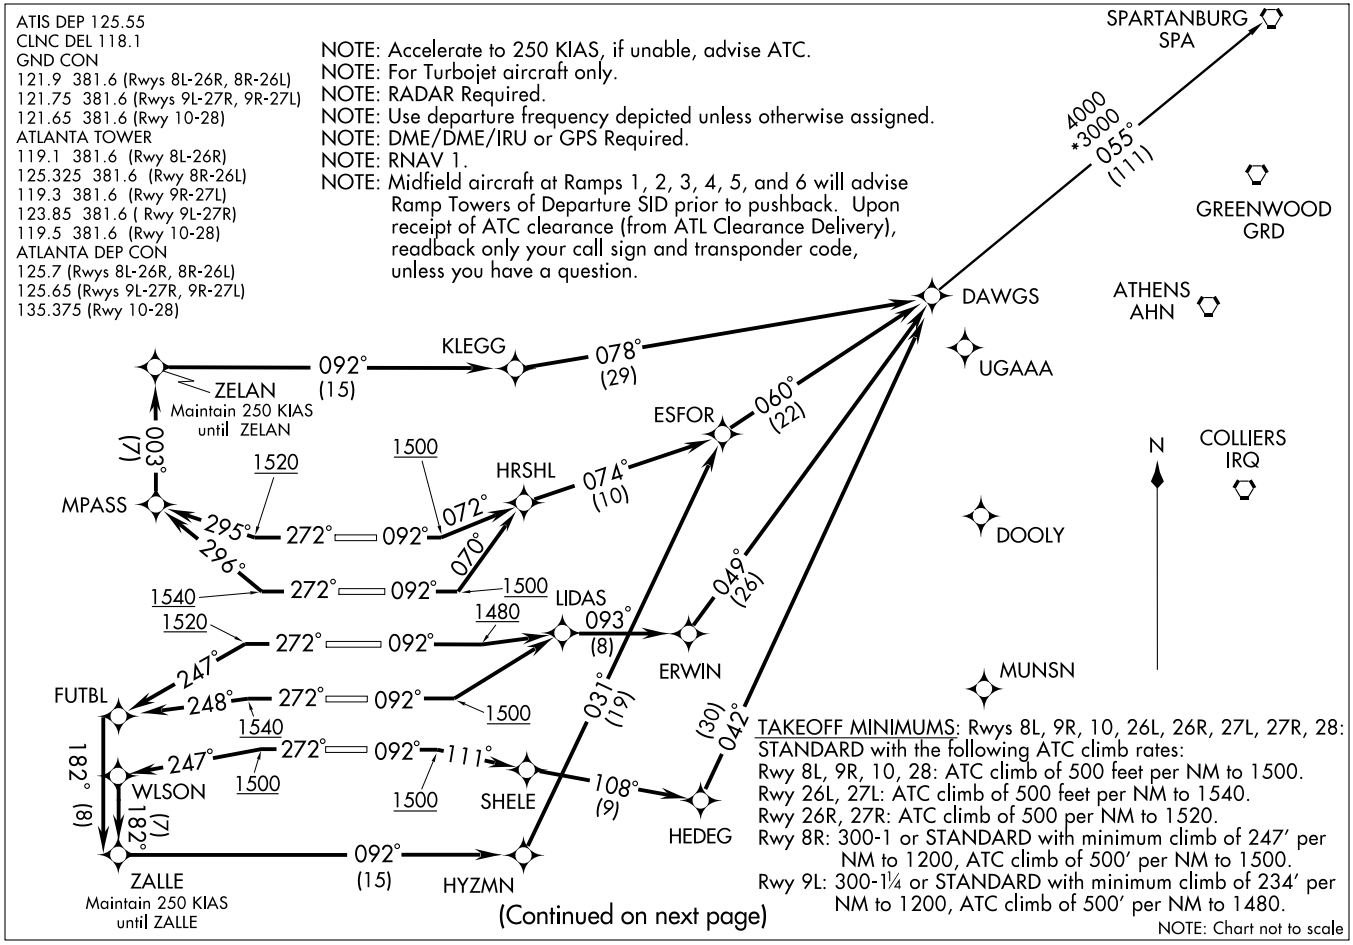

TAKEOFF MINIMUMS: Rwys 8L, 9R, 10, 26L, 26R, 27L, 27R, 28: STANDARD with the following ATC climb rates:
Rwy 8L, 9R, 10, 28: ATC climb of 500 feet per NM to 1500.
Rwy 26L, 27L: ATC climb of 500 feet per NM to 1540.
Rwy 26R, 27R: ATC climb of 500 per NM to 1520.
Rwy 8R: 300-1 or STANDARD with minimum climb of 247′ per NM to 1200, ATC climb of 500′ per NM to 1500.
Rwy 9L: 300-1¼ or STANDARD with minimum climb of 234′ per NM to 1200, ATC climb of 500′ per NM to 1480.

(Continued on next page)

NOTE: Chart not to scale

DAWGS FOUR DEPARTURE (RNAV)
(DAWGS4.DAWGS) 10098
ATLANTA/ HARTSFIELD-JACKSON ATLANTA INTL (ATL)
ATLANTA, GEORGIA

SL-26 (FAA)